




# PRODUCT SPECIFICATION: SCARAB-XL

## DIMENSIONS

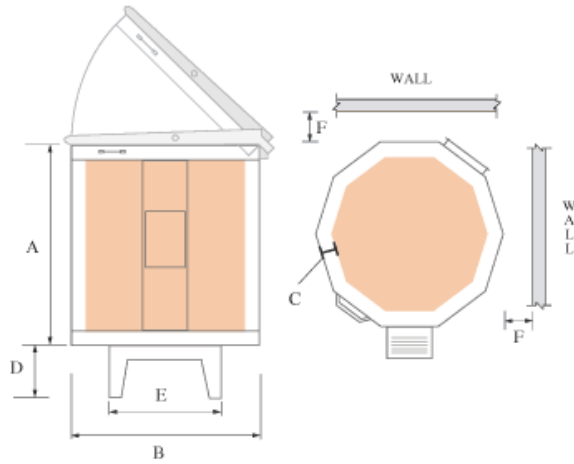

## SPECIFICATIONS & DIMENSIONS

| MODEL     | Phase | Volts | Maximum |      | Chamber |               |        | O.D.Dimension |    |   |   |   |    | Power |       | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|-----------|-------|-------|---------|------|---------|---------------|--------|---------------|----|---|---|---|----|-------|-------|------------------|------------------|-------|
|           |       |       | Cone    | Temp | Depth   | Opening Width | Cu.Ft. | A             | B  | C | D | E | F  | Amps  | Watts |                  |                  |       |
| SCARAB-XL | 1     | 240   |         | 1700 | 20      | 27.00         | 8.1    | 42            | 36 | 3 |   |   | 18 | 48    | 11500 | 6                | 6-50             | 15000 |

## OPTIONAL ACCESORIES

|                                  |          |
|----------------------------------|----------|
| SCARAB ROLLING KILN STAND ADJUST | Optional |
|----------------------------------|----------|

## CONTROLLER

Thermocouple:  
 Clock: 60 Mhz  
 Voltage: DC Relays  
 Output: Volts DC  
 Fuse: AMP



Print this page